




Dimensions/Weight

Overall Dimensions (mm): 150(h) x 900(w) x 500(d)
Duct Diameter (mm): 120mm
Weight: 9kg

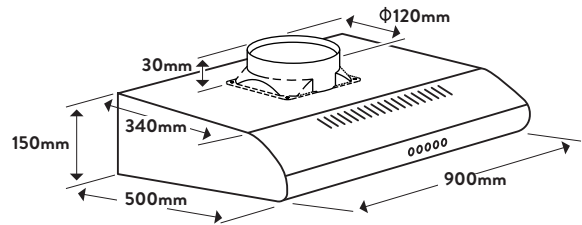

Technical Details

Style

Rangehood Type: Fixed
Category Size: 90cm

Functionality

Extraction Type: Ducted or Front Recirculating
Extraction Rate: 345m³/hr Net
440m³/hr Gross
Number of Motors: 2
Watts of Motor: 100w
Speeds: 3
Filtration: 3 x Aluminium Mesh
Lights: 2 x 40W Incandescent
dBA Rating: 49-56dBA

Accessories

Charcoal Filter: Optional (ORCF110 X 2)

Installation

Maximum Current: 3 Pin Plug
Connection: 220 - 240V, 50Hz
Installation Type: Built-in to Overhead Cabinetry

Warranty: 24 Months Parts & Labour

Aesthetics

Finish: Brushed Stainless Steel
Controls: Push Buttons

Key Features



Front Recirculation

A recirculating rangehood draws the air inside the appliance, cleans it and pushes it through the front panel. Because there is no ducting required, these rangehoods are very easy to install.



Washable Filter

The removable, washable filter is easy to maintain and keep clean ensuring your rangehood always performs well.



Shallow Height

This rangehood has a shallow height meaning it is perfect for an areas with low overhead cupboards.

Customer Care

T: 1300 739 033 (AU) 09 415 6000 (NZ)
E: customercare@omegaappliances.com.au customercare@monacocorp.co.nz

Updated 30/01/2020 - V1

NB: Drawings are not to scale - they are to assist only.
WARNING: technical specifications and product sizes can be varied by the manufacturer without notice. Cutouts for appliances should only be by physical product measurements. The above information is indicative only.