




Dimensions/Weight

Overall Dimensions (mm):	176(h) x 600(w) x 280(d) (430d extended)
Duct Diameter (mm):	120mm
Weight:	9kg

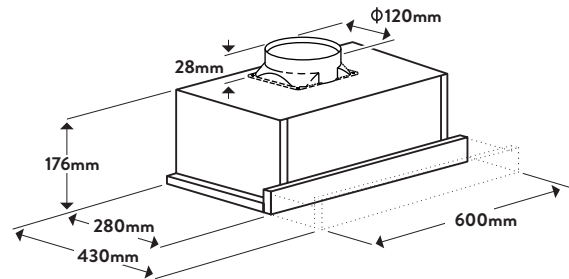

Technical Details

Style

Rangehood Type:	Slide-out
Category Size:	60cm

Functionality

Extraction Type:	Ducted or Front Recirculated
Extraction Rate:	400m ³ /hr Net 440m ³ /hr Gross
Number of Motors:	2
Watts of Motor:	100w
Speeds:	2
Filtration:	2 x Aluminium Mesh
Lights:	2 x 28W Halogen
dBA Rating:	45-54dBA

Accessories

Charcoal Filter:	Optional (ORCF110)
------------------	--------------------

Installation

Maximum Current:	10amps 3 Pin Plug
Connection:	240V, 50Hz
Installation Type:	Built Into Overhead Cabinetry

Warranty:	24 Months Parts & Labour
-----------	--------------------------

Aesthetics

Finish:	White Body With Stainless Steel Fascia Panel
Front Rail:	Yes 40mm Fixed
Control Type:	Rocker switch

Key Features



Washable Filter

The removable, washable filter is easy to maintain and keep clean ensuring your rangehood always performs well.



Recirculation

Sometimes it's not possible to duct your rangehood. If that's the case, then it's likely you'll need a recirculating Omega hood. These cleverly designed appliances draw the grease laden smoke and steam air inside the unit before cleaning and purify it — then sending it back as fresh air through the front panel. And, because there's no ducting, you can be up and running in no time.

Customer Care

T: 1300 739 033 (AU)

E: customercare@omegaappliances.com.au

09 415 6000 (NZ)

customercare@monacocorp.co.nz

Updated 30/01/2020 - V1

NB: Drawings are not to scale - they are to assist only.

WARNING: technical specifications and product sizes can be varied by the manufacturer without notice. Cutouts for appliances should only be by physical product measurements. The above information is indicative only.