




Dimensions/Weight

Overall Dimensions (mm): 150(h) x 600(w) x 500(d)
 Chimney Height (mm): N/A
 Flue Diameter (mm): 120mm
 Weight: 7.5kg

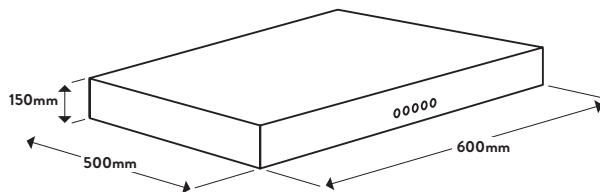

Technical Details

Style

Rangehood Type: Fixed
 Category Size: 60cm

Functionality

Extraction Type: Ducted or Recirculating
 Extraction Rate: 333m³/hr Net
 Number of Motors: 2
 Watts of Motor: 100w
 Speeds: 3
 Filtration: 2 x Aluminium Removable & Washable Filters
 Lights: 2 x 40W Incandescent
 dBA Rating: 48-56dBA

Accessories

Carbon Filter: Optional (ORCF110 x 2)

Installation

Maximum Current: 3 Pin Plug
 Connection: 220 - 240V, 50Hz
 Installation Type: Built-in to a Cupboard
 Warranty: 24 Months Parts & Labour

Aesthetics

Finish: Brushed Stainless Steel
 Controls: Push Buttons
 Chimney Extension: Optional OREF782A

Key Features



Recirculation

Sometimes it's not possible to duct your rangehood. If that's the case, then it's likely you'll need a recirculating Omega hood. These cleverly designed appliances draw the grease laden smoke and steam air inside the unit before cleaning and purify it — then sending it back as fresh air through the front panel. And, because there's no ducting, you can be up and running in no time.



Washable Filter

The removable, washable filter is easy to maintain and keep clean ensuring your rangehood always performs well.



Shallow Height

This rangehood has a shallow height meaning it is perfect for an areas with low overhead cupboards plus at only 60cm wide means it is perfect for smaller cooktops and spaces.

Customer Care

T: 1300 739 033 (AU) 09 415 6000 (NZ)
 E: customercare@omegaappliances.com.au customercare@monacocorp.co.nz

Updated 30/01/2020 - V1

NB: Drawings are not to scale - they are to assist only.
 WARNING: technical specifications and product sizes can be varied by the manufacturer without notice. Cutouts for appliances should only be by physical product measurements. The above information is indicative only.

